

# Lista sa podacima o proizvodima

Specifikacije



## Zujalica, Easy Harmony XB2, plastična, crna, 22mm, 90dB, 24V AC/DC

XB2BSBC

### Osnovne informacije

Grupa proizvoda	Harmony XB2
Tip proizvoda ili komponente	Signalni uređaj
Materijal podnožja	Plastika
Prečnik za montiranje	22,5 mm
Boja kapica/glave ili sočiva	Crna
Kratko ime uređaja	XB2

### Dopunske informacije

Tip kola napajanja	AC/DC
Frekvencija napajanja	50/60 Hz
Tip signalizacije	Stalna zujalica, jedan ton
noise level	90 dB AC 90 dB DC
Oblik glave zavrtnja	Ukrštena kompatibilno sa Philips no 1 odvijač Ukrštena kompatibilno sa pozidriv No 1 odvijač Sa prorezom kompatibilno sa matica Ø 4 mm odvijač Sa prorezom kompatibilno sa matica Ø 5.5 mm odvijač
Visina	30 mm
Širina	30 mm
Dubina	57,2 mm
masa proizvoda	0,017 kg
Struja potrošnje	<= 20 mA
Oblik glave signalne jedinice	Okrugla
[us] nazivni napon	24 V +/- 10 %
Radni položaj	Bilo koja pozicija
Servisni vek u časovima	20000 sati
[ui] nazivni napon izolacije	400 V (stepen zaprljanosti 3) u skladu sa IEC 60947-1
[uimp] nazivni podnosivi impulsni napon	6 kV u skladu sa IEC 60947-1

### Okruženje

Tretman zaštite	TC
Temperatura okoline za skladištenje	-40...80 °C
Temperatura okoline za rad uređaja	-25...70 °C

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

<b>Kategorija prenapona</b>	Klasa II conforming to IEC 60536
<b>Standardi</b>	IEC 60947-5-1 IEC 60947-1 GB/T 14048.1 GB/T 14048.5
<b>Sertifikacija proizvoda</b>	programabilan kao logički ulaz sprovedene i zračene emisije sa bajpasom
<b>Ip stepen zaštite</b>	IP40
<b>Ik stepen zaštite</b>	IK06

## Pakovanje

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3,000 cm
<b>Package 1 Width</b>	8,000 cm
<b>Package 1 Length</b>	8,000 cm
<b>Package 1 Weight</b>	19,000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	100
<b>Package 2 Height</b>	15,000 cm
<b>Package 2 Width</b>	30,000 cm
<b>Package 2 Length</b>	40,000 cm
<b>Package 2 Weight</b>	2,315 kg

## Ugovorna garancija

<b>Garancija (u mesecima)</b>	60
-------------------------------	----

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

[Objašnjeni Environmental Data >](#)

[Kako procenjujemo održivost proizvoda >](#)

### Ekološki otisak

Ukupan životni vek ugljeničnog otiska	0.9 kg CO2 eq.
Ugljenični otisak faze proizvodnje [A1–A3]	0.5 kg CO2 eq.
Ugljenični otisak faze distribucije [A4]	0 kg CO2 eq.
Ugljenični otisak faze instalacije [A5]	0 kg CO2 eq.
Ugljenični otisak faze korišćenja [B2, B3, B4, B6]	0.4 kg CO2 eq.
Ugljenični otisak faze kraja životnog ciklusa [C1–C4]	0 kg CO2 eq.
Izjava o zaštiti okoliša	<a href="#">Profil ekološke prihvatljivosti proizvoda</a>

### Use Better

#### Materijali i pakovanje

Pakovanje sa recikliranim kartonom	Da
Pakovanje bez plastike	Ne
SCIP broj	9e63340a-2371-4381-8f9a-5fba0ff349a4
Direktiva RoHS	<a href="#">Usaglašeno</a>
Uredba REACH	<a href="#">Referenca ne sadrži SVHC iznad propisanog praga</a>


### Use Longer

#### Produženje trajanja veka

Popravka	Ne
----------	----

### Use Again


#### Prepakovanje i prefabrikovanje

Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
Povraćaj	No
WEEE oznaka	 Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Dimensions Drawings

Dimensions

---

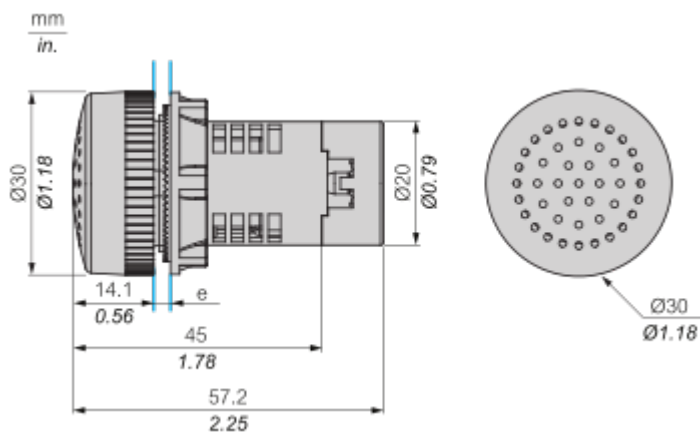


e: clamping thickness 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Mounting and Clearance

---

Panel cut-out

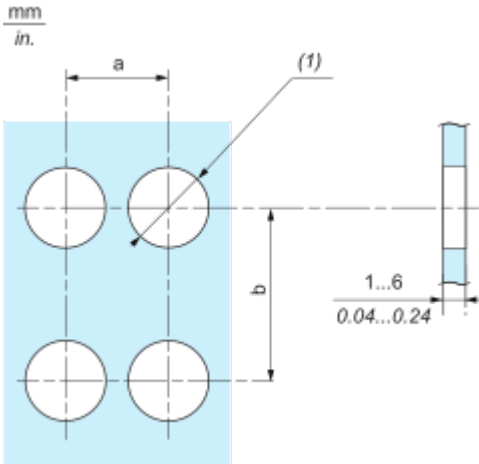


	Connection by Screw clamp terminals			
	a in mm	a in in.	b in mm	b in in.
XB2BS...	40	1.57	30	1.18
XB2BV...	40	1.57	30	1.18

(1)  $\varnothing 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\varnothing 22.3 \text{ mm}_0^{+0.4} / 0.88 \text{ in.}_0^{+0.016})$

Technical Illustration

Dimensions

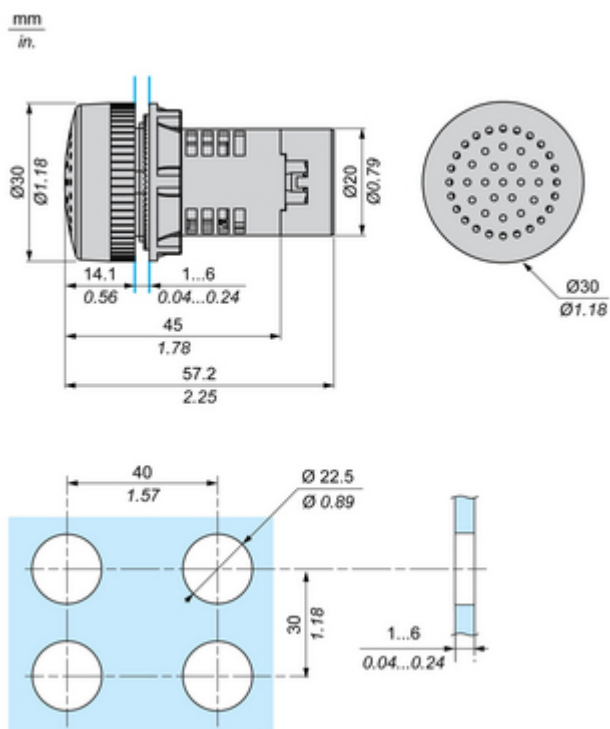

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Easy Harmony XB2

Supports operating  
temperature from  
-25°C to +70°C

Excellent resistance  
to mechanical shock  
and vibration



Conforming to CE, CCC and  
ROHS standards

Up to IP65  
protection ratings

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Easy Harmony XB2

- 

Metal bezels with metal fixing collars for impact endurance
- 

Designed to be used in numerous control and signaling applications
- 

Metal screws for secure fix, grounding contact to the panel and anti-rotation
- 

Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists
- 

Available in sub-assemblies for easy mix and match of functionalities

Image of product / Alternate images

Alternative

---



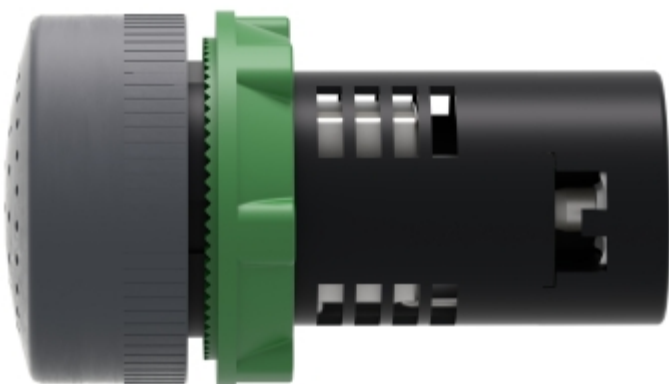




Image of product in real life situation

