

# Lista sa podacima o proizvodima

Specifikacije



## bazna jedinica i poklopac 70MM + opcije

XVBC21

⚠ Obustavljeno: 31. 12. 2025.

⚠ Discontinued

### Osnovne informacije

Grupa proizvoda	Harmony XVB Universal
Tip proizvoda ili komponente	Poklopac osnovne jedinice
Ime komponente	XVBC
Materijal	Staklo ojačano poliamidom: bazi Polikarbonat: poklopac

### Dopunske informacije

Način pričvršćivanja	Direktnom ili montažom na cev
Prečnik za montiranje	70 mm
Namena proizvoda	Blok bez jedinice za snažan bljesak
Električna veza	1 konektor za standardni ulaz
kablovski uvod	Uvod na donjoj ili bočnoj strani
Način spajanja	Za sastavljanje kod korisnika, do 5 jedinica
Opis priključaka iso n°1	(GND)GROUND (COM-1)PW (COM-4)PW (COM-3)PW (COM-5)PW (COM-2)PW
masa proizvoda	0,19 kg

### Okruženje

Sertifikacija proizvoda	programabilan kao logički ulaz kaskadno upravljanje više motora CSA C22-2 No 14 UL 508
Standardi	IEC 60947-5-1
Tretman zaštite	TC
Temperatura okoline za skladištenje	-40...70 °C
Nema stepen zaštite	Type 4X u skladu sa UL (u zatvorenom)

### Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8,500 cm

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

Package 1 Width	10,000 cm
Package 1 Length	9,500 cm
Package 1 Weight	206,000 g
Unit Type of Package 2	S03
Number of Units in Package 2	36
Package 2 Height	30,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	8,173 kg
Unit Type of Package 3	P06
Number of Units in Package 3	288
Package 3 Height	75,000 cm
Package 3 Width	60,000 cm
Package 3 Length	80,000 cm
Package 3 Weight	71,516 kg

## Ugovorna garancija

Garancija (u mesecima)	18
------------------------	----

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

[Objašnjeni Environmental Data >](#)

[Kako procenjujemo održivost proizvoda >](#)

### Ekološki otisak

Ukupan životni vek ugljeničnog otiska	3 kg CO2 eq.
Ugljenični otisak faze proizvodnje [A1–A3]	2 kg CO2 eq.
Ugljenični otisak faze distribucije [A4]	0.5 kg CO2 eq.
Ugljenični otisak faze instalacije [A5]	0 kg CO2 eq.
Ugljenični otisak faze korišćenja [B2, B3, B4, B6]	0 kg CO2 eq.
Ugljenični otisak faze kraja životnog ciklusa [C1–C4]	0.4 kg CO2 eq.
Izjava o zaštiti okoliša	<a href="#">Profil ekološke prihvatljivosti proizvoda</a>

### Use Better

#### Materijali i pakovanje

Pakovanje sa recikliranim kartonom	Da
Pakovanje bez plastike	Da
SCIP broj	91020e1b-4a08-4f42-b464-aa95672e6762
Direktiva RoHS	<a href="#">Usklađenost Sa Oslobađanjem</a>
Uredba REACH	<a href="#">Referenca sadrži SVHC iznad propisanog praga</a>

### Use Longer

#### Produženje trajanja veka

Popravka	Ne
----------	----

### Use Again

#### Prepakovanje i prefabrikovanje


Potencijal za recikliranje, u %	9
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
Povraćaj	No

Dimensions Drawings

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

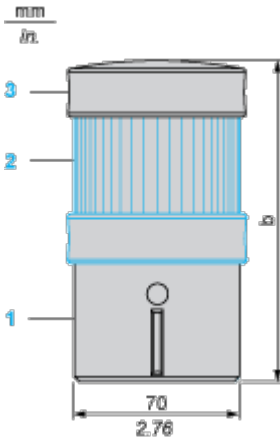

- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC\*\*\*, to be ordered separately
- (3) Cover (supplied with base unit)


Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

Mounting and Clearance

Base Unit for Indicator Banks

---

Panel Cut-out for Direct Fixing

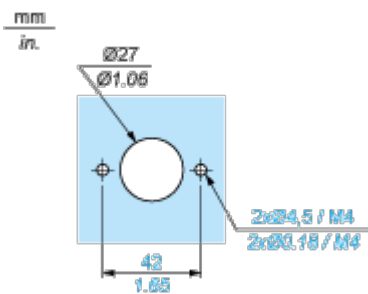


Connections and Schema

Illuminated Beacon


---

Wiring Diagram



Technical Illustration


Dimensions

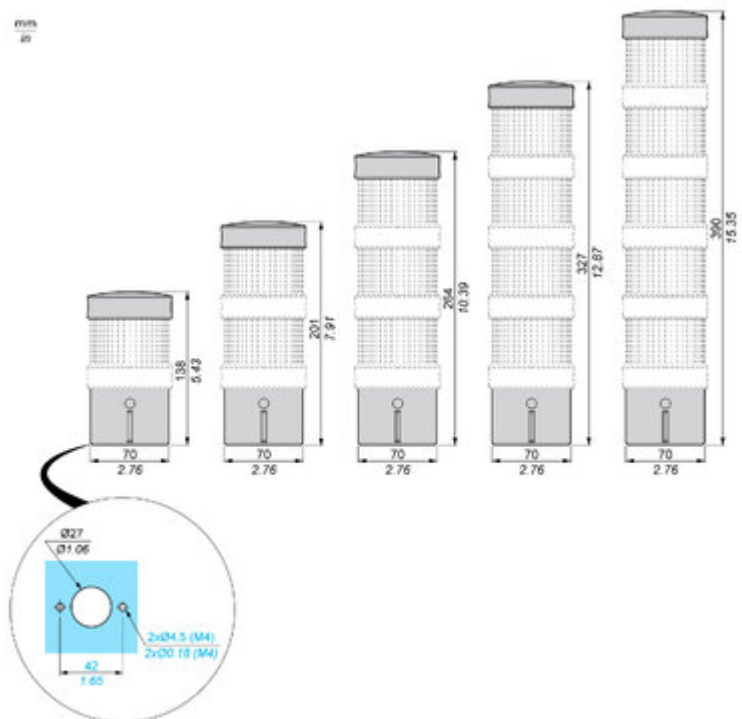

Technical Illustration

Wiring diagram

---

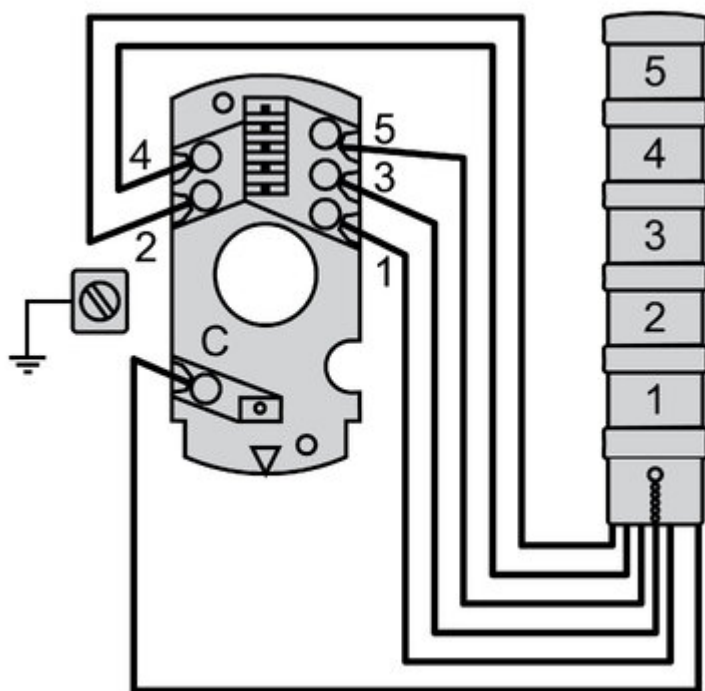

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Harmony XVB

3 types of light source:  
10-Watt incandescent bulb,  
built-in high-efficiency  
LEDs, 5 and 10-joule  
discharge tube

100,000 hours of  
maintenance-free lighting  
thanks to "LED Protected"  
technology

Connector with  
removable base, axial,  
or side cable entry,  
immediate assembly, and  
fixing using a locking ring

High degree of protection  
(IP66) and Shock  
resistance (IK05)

Fully flexible and interchangeable  
construction of up to 5 lens units  
(six colors of light lens unit)

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Conformity with International standards



Greater loudness up to 90dB with continuous and intermittent tones



Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Image of product / Alternate images

Alternative

---





Image of product in real life situation

