

Lista sa podacima o proizvodima

Specifikacije



780MM crna aluminijumski stub i baza

XVBZ04

⚠ Obustavljeno: 10. 2. 2026.

⚠ Nije u prodaji

Osnovne informacije

Grupa proizvoda	Harmony XVB
Pribor / posebna namena	Osnova za montažu
Tip proizvoda ili komponente	Fixing base
Pribor / posebna kategorija	Pribor za montažu
Pribor / posebna namena	Semafori i svetleće kolone Ø 70 mm

Dopunske informacije

Pribor / posebni tip	Baza za montažu
Kompatibilnost proizvoda	XVBC. XVBL.
Sastav seta	Crna plastična ploča za montažu Ø 25 mm aluminijumski cevasti nosač
Visina ispod baze	780 mm
Boja	Crna aluminijum
masa proizvoda	0,325 kg

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7,000 cm
Package 1 Width	8,000 cm
Package 1 Length	83,000 cm
Package 1 Weight	322,000 g
Unit Type of Package 2	P12
Number of Units in Package 2	50
Package 2 Height	30,000 cm
Package 2 Width	80,000 cm
Package 2 Length	120,000 cm
Package 2 Weight	28,100 kg

Ugovorna garancija

Garancija (u mesecima)	18
------------------------	----

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

[Objašnjeni Environmental Data >](#)

[Kako procenjujemo održivost proizvoda >](#)

Ekološki otisak

Ukupan životni vek ugljeničnog otiska	4 kg CO2 eq.
Ugljenični otisak faze proizvodnje [A1–A3]	3 kg CO2 eq.
Ugljenični otisak faze distribucije [A4]	0.1 kg CO2 eq.
Ugljenični otisak faze instalacije [A5]	0.1 kg CO2 eq.
Ugljenični otisak faze korišćenja [B2, B3, B4, B6]	0 kg CO2 eq.
Ugljenični otisak faze kraja životnog ciklusa [C1–C4]	0.6 kg CO2 eq.
Izjava o zaštiti okoliša	Profil ekološke prihvatljivosti proizvoda

Use Better

Materijali i pakovanje

Pakovanje sa recikliranim kartonom	Da
Pakovanje bez plastike	Da
SCIP broj	124e2d7a-5b1e-45ca-b93c-220dd91b55b6
Direktiva RoHS	Usklađenost Sa Oslobađanjem
Uredba REACH	Referenca sadrži SVHC iznad propisanog praga

Use Longer

Produženje trajanja veka

Popravka	Ne
----------	----


Use Again

Prepakovanje i prefabrikovanje

Potencijal za recikliranje, u %	9
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
Povraćaj	No

Dimensions Drawings


Dimensions and Mounting

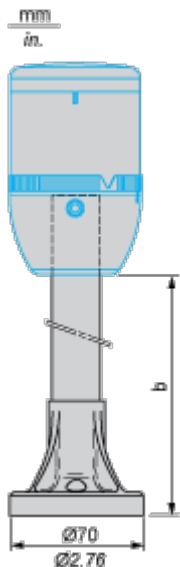

Height under base unit	
b in mm	b in in.
780	30.71


Mounting and Clearance

Panel Cut-Out



Technical Illustration

Dimensions

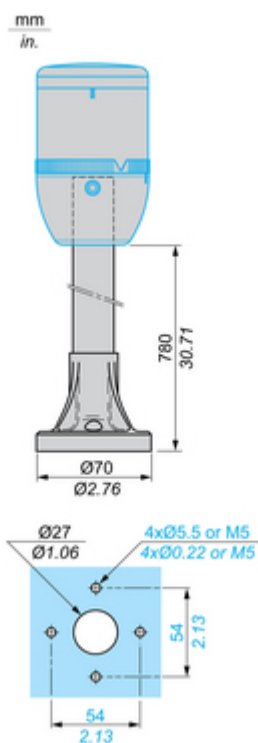

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Conformity with International standards



Greater loudness up to 90dB with continuous and intermittent tones



Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Offer Marketing Illustration

Product benefits / Features

Features
Harmony XVB

Light Source Options: 3 types of light source: 10-Watt incandescent bulb, built-in high-efficiency LEDs, 5 and 10-joule discharge tube

Longevity: 100,000 hours of maintenance-free lighting thanks to "LED Protected" technology

Connector Flexibility: Connector with removable base, axial, or side cable entry, immediate assembly, and fixing using a locking ring

Protection: High degree of protection (IP66) and Shock resistance (IK05)

Interchangeability: Fully flexible and interchangeable construction of up to 5 lens units (six colors of light lens unit)

Image of product / Alternate images

Alternative





