

# Lista sa podacima o proizvodima

Specifikacije



Beacon, Harmony XVR, illuminated beacon without buzzer, green, 100mm, integral LED, 12...24V DC

XVR3B03

## Osnovne informacije

|                                       |  |
|---------------------------------------|--|
| Grupa proizvoda                       | Harmony XVR  |
| Tip proizvoda ili komponente          | Svetiljka  |
| Kratko ime uređaja                    | XVR3   |
| Tip baze svetleće kolone ili semafora | LED jedinica   |
| Prečnik za montiranje                 | 100 mm   |
| Svetlosni izvor                       | LED, zelena  |
| Primena uređaja                       | Forklift<br>Buldozer<br>Automated guided vehicle (AGV) |

## Dopunske informacije

|                              |   |
|------------------------------|---|
| Tip signalizacije            | Treperenje<br>Rotacija<br>Treperenje  |
| Način spajanja               | Unapred sastavljeno   |
| Materijal                    | PC (polikarbonat): sočiva<br>PBT (polybutylene terephthalate) + PC (polycarbonate): telo<br>EPDM (ethylene propylene diene monomer): baza |
| [us] nazivni napon napajanja | 12...24 V DC  |
| [ue] nazivni napon           | 10...30 V DC  |
| Udarna struja                | 3 A   |
| Potrošnja                    | 2,8 W   |
| Označavanje                  | Procesna industrija i infrastruktura  |
| pravac instalacije           | Upright zatvoreni<br>Sideways zatvoreni<br>Inverted zatvoreni<br>Upright na otvorenom   |
| Električna klasa izolacije   | Klasa II  |
| Potrošnja struje             | 3000 mA   |
| Dužina                       | 100 mm  |
| Širina                       | 100 mm  |
| Visina                       | 139 mm  |
| masa proizvoda               | 0,484 kg  |

## Okruženje

Temperatura okoline za rad -20...50 °C

uređaja

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

|                                     |  |
|-------------------------------------|--|
| Temperatura okoline za skladištenje | -35...70 °C  |
| Relativna vlažnost                  | 35...85 % bez kondenzacije                                 |
| otpornost na vibracije              | 4.6 gn (sideways)<br>4.6 gn (inverted)<br>7.1 gn (upright) |
| IP stepen zaštite                   | IP65 (upright)<br>IP23 (sideways)<br>IP23 (inverted)       |

## Pakovanje

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 18,300 cm |
| Package 1 Width              | 13,700 cm |
| Package 1 Length             | 13,500 cm |
| Package 1 Weight             | 637,000 g |
| Unit Type of Package 2       | S04       |
| Number of Units in Package 2 | 8         |
| Package 2 Height             | 30,000 cm |
| Package 2 Width              | 40,000 cm |
| Package 2 Length             | 60,000 cm |
| Package 2 Weight             | 5,992 kg  |

## Ugovorna garancija

|                        |    |
|------------------------|----|
| Garancija (u mesecima) | 18 |
|------------------------|----|

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

[Objašnjeni Environmental Data >](#)

[Kako procenjujemo održivost proizvoda >](#)

### Ekološki otisak

Izjava o zaštiti okoliša

[Profil ekološke prihvatljivosti proizvoda](#)

## Use Better

### Materijali i pakovanje

Pakovanje sa recikliranim kartonom

Da

Pakovanje bez plastike

Da

Direktiva RoHS

[Uskladenost Sa Oslobađanjem](#)

Uredba REACH

[Referenca sadrži SVHC iznad propisanog praga](#)

## Use Longer

### Produženje trajanja veka

Popravka

Ne

## Use Again

### Prepakovanje i prefabrikovanje

Profil cirkularnosti

[Informacije o kraju radnog veka](#)

Povraćaj

No

WEEE oznaka




Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Dimensions Drawings

Dimensions

---

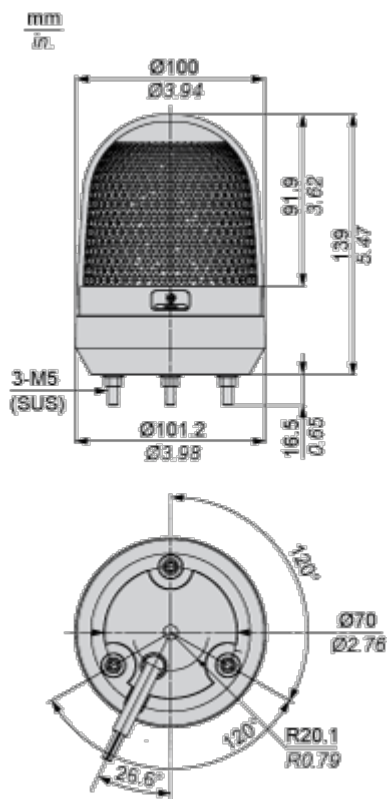


Mounting and Clearance


Panel Cut-out

---

Straight wiring

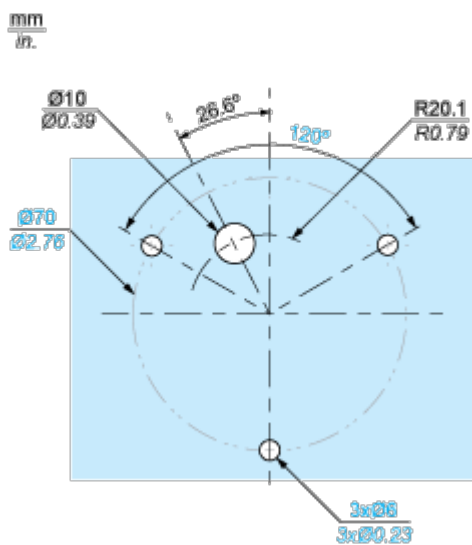


Side wiring

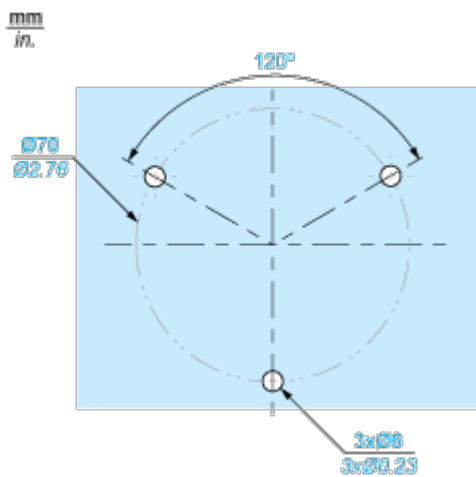

Connections and Schema

Wiring Diagram

---

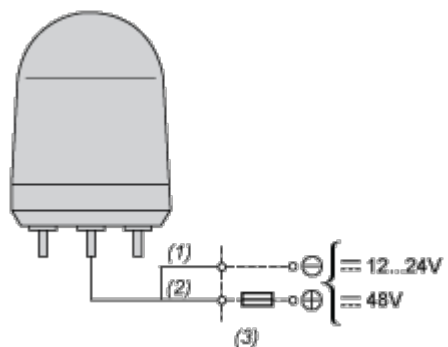


- (1) Black
- (2) White
- (3) Fuse(Rated Current>2A)

Technical Illustration

Dimensions


---

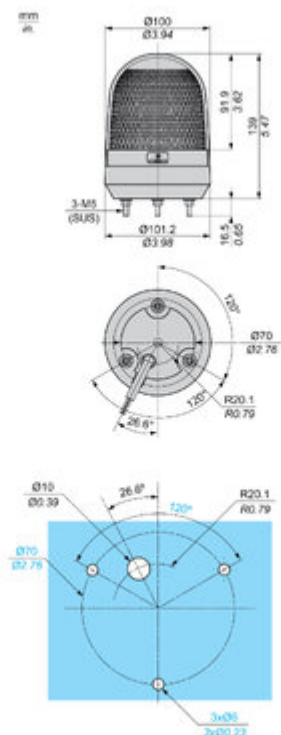

Technical Illustration

Wiring diagram

---

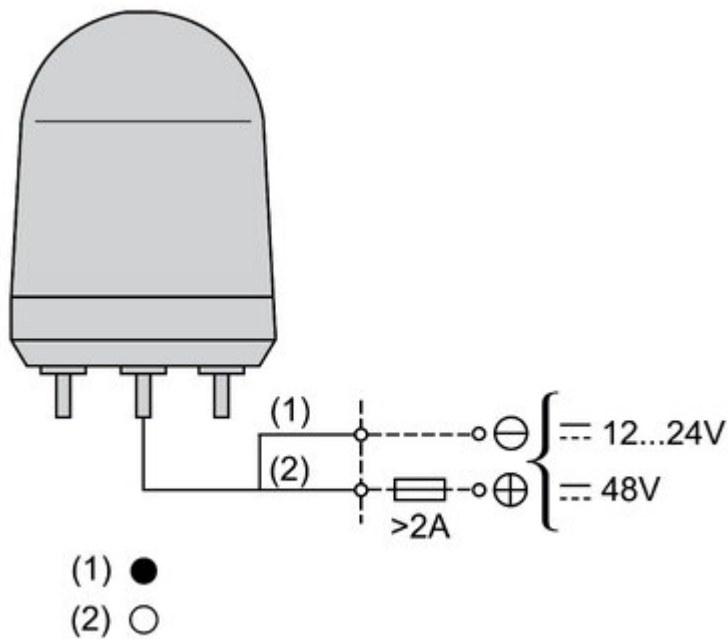

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Harmony XVR3

- 4 colors with 10 light patterns to select with one switch
- High visibility of machine status
- Simplified installation (pre-cabled and pre-assembled products) and easy maintenance
- Buzzer volume adjustment through a built-in switch
- Available in various diameters to suit different industrial applications

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVR3

Conforms with international IEC standards as well as CE, UL and CCC marking

Protection ratings up to IP65 and vibration resistance to increase reliability



Can be mounted in diverse positions: upright, sideways, and inverted

Motor-less super-bright LED with 360° visibility



Operating temperature from -10 °C to 50 °C

Image of product / Alternate images

Alternative

---

