

# Lista sa podacima o proizvodima

Specifikacije



Beacon, Harmony XVR, Illuminated beacon with buzzer, orange, 100mm, 70...90dB, integral LED, 12...24V DC

XVR3B05S

## Osnovne informacije

Grupa proizvoda	Harmony XVR
Tip proizvoda ili komponente	Svetiljka
Kratko ime uređaja	XVR3
Tip baze svetleće kolone ili semafora	LED jedinica
zvučni signal	Zujalica: 70...90 dB at 1 m
Prečnik za montiranje	100 mm
Svetlosni izvor	LED, narandžasta
Primena uređaja	Forklift Buldozer Automated guided vehicle (AGV)

## Dopunske informacije

Tip signalizacije	Rotacija Treperenje Treperenje
Način spajanja	Unapred sastavljeno
Materijal	PC (polikarbonat): sočiva PBT (polybutylene terephthalate) + PC (polycarbonate): telo EPDM (ethylene propylene diene monomer): baza
[us] nazivni napon napajanja	12...24 V DC
[ue] nazivni napon	10...30 V DC
Udarna struja	3 A
Potrošnja	3,1 W
Označavanje	Procesna industrija i infrastruktura
pravac instalacije	Upright zatvoreni Sideways zatvoreni Inverted zatvoreni Upright na otvorenom
Električna klasa izolacije	Klasa II
Potrošnja struje	3000 mA
Dužina	100 mm
Širina	100 mm
Visina	139 mm
masa proizvoda	0,538 kg

## Okruženje

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

Temperatura okoline za rad uređaja	-20...50 °C
Temperatura okoline za skladištenje	-35...70 °C
Relativna vlažnost	35...85 % bez kondenzacije
otpornost na vibracije	4.6 gn (sideways) 4.6 gn (inverted) 7.1 gn (upright)
IP stepen zaštite	IP23 (sideways) IP23 (inverted) IP23 (upright)

## Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	18,400 cm
Package 1 Width	13,600 cm
Package 1 Length	13,600 cm
Package 1 Weight	677,000 g
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30,000 cm
Package 2 Width	40,000 cm
Package 2 Length	60,000 cm
Package 2 Weight	6,287 kg

## Ugovorna garancija

Garancija (u mesecima)	18
------------------------	----

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

[Objašnjeni Environmental Data >](#)

[Kako procenjujemo održivost proizvoda >](#)

### Ekološki otisak

Ukupan životni vek ugljeničnog otiska	54 kg CO2 eq.
Ugljenični otisak faze proizvodnje [A1–A3]	13 kg CO2 eq.
Ugljenični otisak faze distribucije [A4]	0.1 kg CO2 eq.
Ugljenični otisak faze instalacije [A5]	0 kg CO2 eq.
Ugljenični otisak faze korišćenja [B2, B3, B4, B6]	41 kg CO2 eq.
Ugljenični otisak faze kraja životnog ciklusa [C1–C4]	0.2 kg CO2 eq.
Izjava o zaštiti okoliša	<a href="#">Profil ekološke prihvatljivosti proizvoda</a>

### Use Better

#### Materijali i pakovanje

Pakovanje sa recikliranim kartonom	Da
Pakovanje bez plastike	Da
Direktiva RoHS	<a href="#">Usklađenost Sa Oslobađanjem</a>
Uredba REACH	<a href="#">Referenca sadrži SVHC iznad propisanog praga</a>

### Use Longer

#### Produženje trajanja veka

Popravka	Ne
----------	----

### Use Again


#### Prepakovanje i prefabrikovanje

Profil cirkularnosti	<a href="#">Informacije o kraju radnog veka</a>
Povraćaj	No

Dimensions Drawings

Dimensions

---

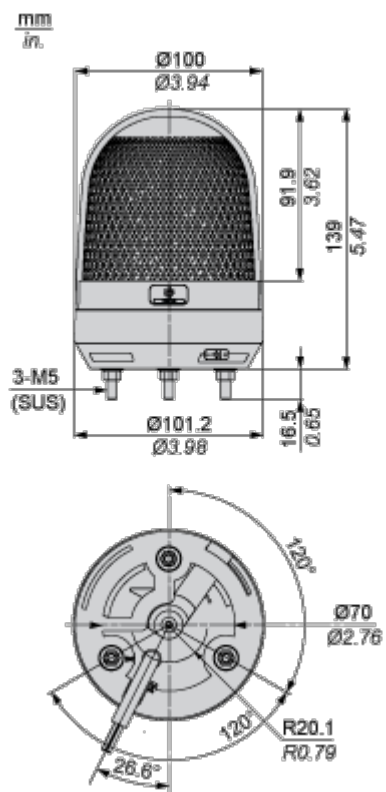


Mounting and Clearance


Panel Cut-out

---

Straight wiring

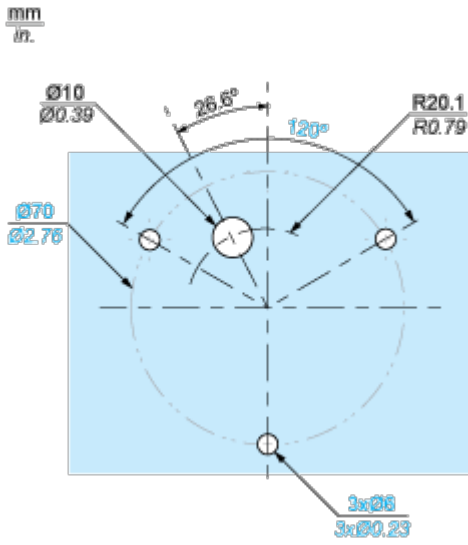


Side wiring

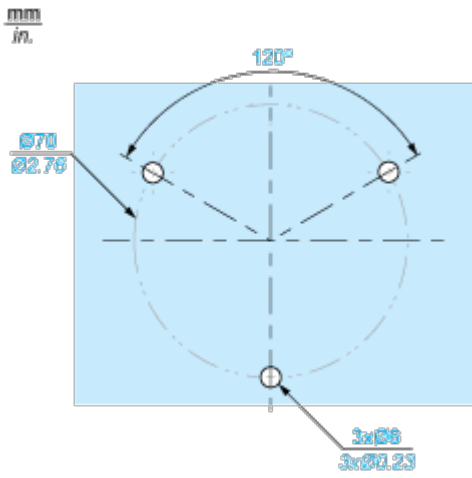

Connections and Schema

Wiring Diagram

---

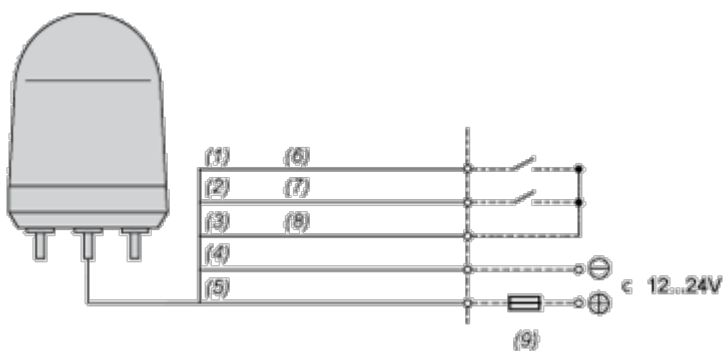

- (1) Green
- (2) Red
- (3) Yellow
- (4) Black
- (5) White
- (6) LED
- (7) Buzzer
- (8) Com
- (9) Fuse(Rated Current>2A)

Technical Illustration

Dimensions


---



Technical Illustration

Wiring diagram

---

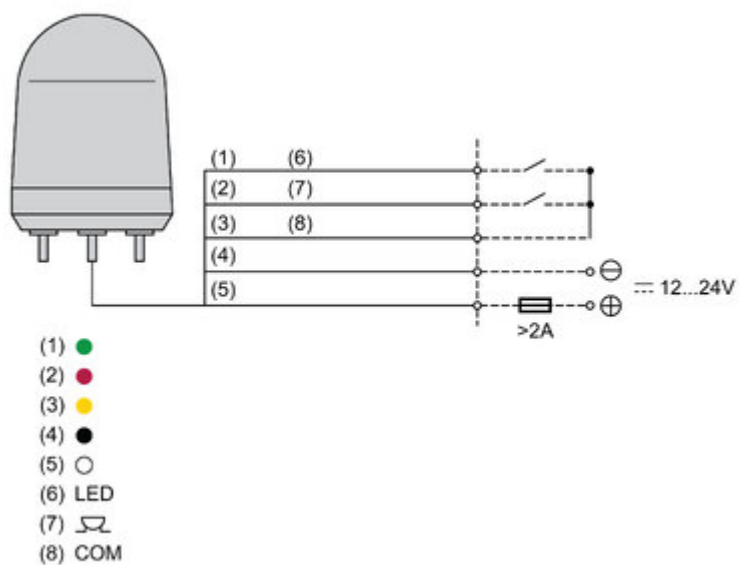

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVR3

Conforms with international IEC standards as well as CE, UL and CCC marking

Protection ratings up to IP65 and vibration resistance to increase reliability



Can be mounted in diverse positions: upright, sideways, and inverted

Motor-less super-bright LED with 360° visibility



Operating temperature from -10 °C to 50 °C

Offer Marketing Illustration

Product benefits / Features

---



The infographic features a central image of a blue, dome-shaped industrial light fixture with a perforated top and a black base. The base has the Schneider Electric logo. Surrounding the central image are five circular icons, each with a corresponding text block describing a feature. The background is a solid green color.

### Features Harmony XVR3

- 4 colors with 10 light patterns to select with one switch**
- Simplified installation (pre-cabled and pre-assembled products) and easy maintenance**
- High visibility of machine status**
- Buzzer volume adjustment through a built-in switch**
- Available in various diameters to suit different industrial applications**

Image of product / Alternate images

Alternative

---

